

Buckets


Backhoe buckets	0.15-6.80m ³
2in1 buckets	0.15-2.00m ³
Universal buckets	0.40-1.00m ³
Ditch cleaning buckets	0.17-2.90m ³
Grading buckets	0.40-0.90m ³
Tilt buckets	0.40-2.00m ³

LIEBHERR

Attachments



Backhoe bucket TL 01

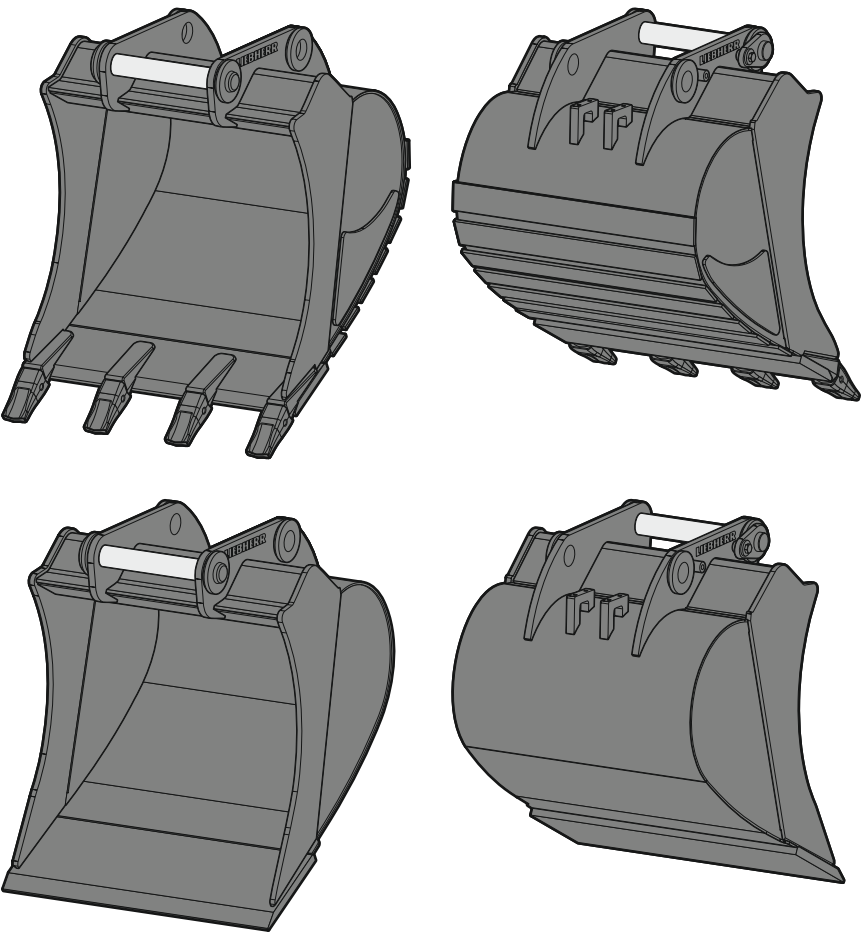

Machine range

Liebherr machines	
Wheeled excavator - Compact	A 909 Compact - A 912 Compact

Other machine makes	
Weight class (see operating manual for exact specification)	approx. 10-12t

Dimensions¹⁾ / weights¹⁾


Cutting width	mm	300 ²⁾	400 ²⁾	450	550	650	750	850	950
Capacity	m³	0.15 ³⁾	0.20 ³⁾	0.17	0.22	0.27	0.33	0.38	0.44
Weight	kg	160	185	165	195	210	230	245	260
Teeth		2	3	3	3	4	4	4	4

¹⁾ based on standard backhoe bucket with SWA 33 quick coupler mounting and UNI-25-2C teeth

²⁾ limited digging depth due to mounting for SWA 33 quick coupler

³⁾ reduced capacity with direct mounting

Backhoe bucket TL 02

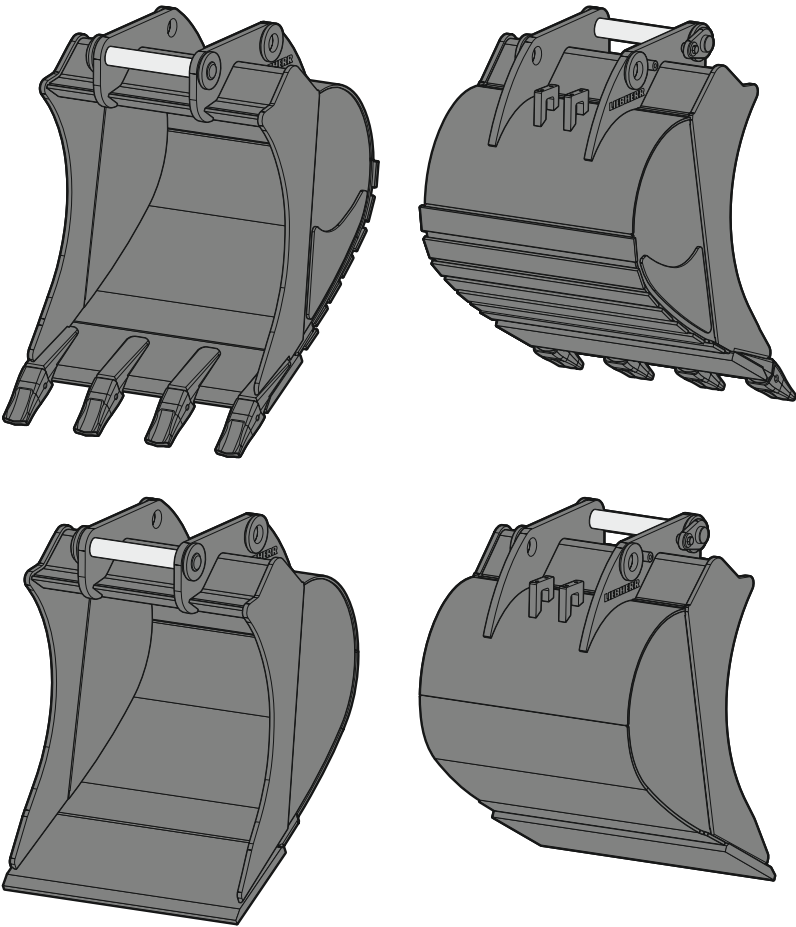

Machine range

Liebherr machines		Other machine makes	
Wheeled excavator – Compact	A 913 Compact – A 916 Compact	Weight class	approx. 13-15t
Wheeled excavator	A 914	(see operating manual for exact specification)	
Crawler excavator – Compact	R 914 Compact		

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	300 ^{2) 3)}	400 ^{2) 3)}	500 ³⁾	550	650	850	1,050	1,250
Capacity	m³	0.17 ⁴⁾	0.24 ⁴⁾	0.32 ⁴⁾	0.29	0.36	0.50	0.65	0.80
Weight	kg	225	245	250	260	285	335	380	430
Teeth		2	2	3	3	3	4	4	5


¹⁾ based on standard backhoe bucket with SWA 33 quick coupler mounting and UNI-35-3C teeth

²⁾ limited digging depth due to mounting for SWA 33 quick coupler

³⁾ limited digging depth due to mounting for SWA 48 quick coupler

⁴⁾ reduced capacity with direct mounting

Backhoe bucket TL 03

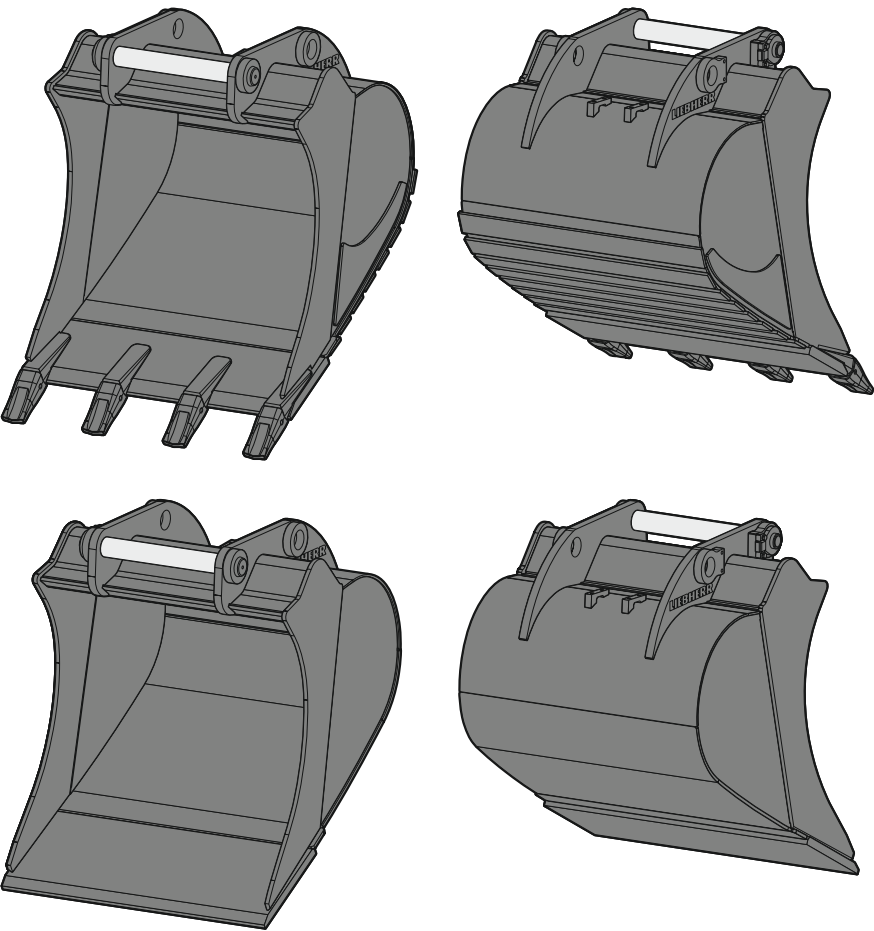

Machine range

Liebherr machines	
Wheeled excavator – Compact	A 918 Compact
Wheeled excavator	A 916 – A 918
Crawler excavator – Compact	R 920 Compact
Railroad excavator	A 922 Rail, A 924 Rail

Other machine makes	
Weight class (see operating manual for exact specification)	approx. 16-19t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	300 ^{2) 3)}	400 ^{2) 3)}	500 ³⁾	650	750	850	1,050	1,250
Capacity	m ³	0.17 ⁴⁾	0.24 ⁴⁾	0.32	0.42	0.50	0.60	0.80	0.95
Weight	kg	270	290	295	375	395	435	510	555
Teeth		2	2	3	3	3	4	4	5


¹⁾ based on standard backhoe bucket with SWA 48 quick coupler mounting and UNI-35-3C teeth

²⁾ limited digging depth due to mounting for SWA 33 quick coupler

³⁾ limited digging depth due to mounting for SWA 48 quick coupler

⁴⁾ reduced capacity with direct mounting

Backhoe bucket TL 04-01

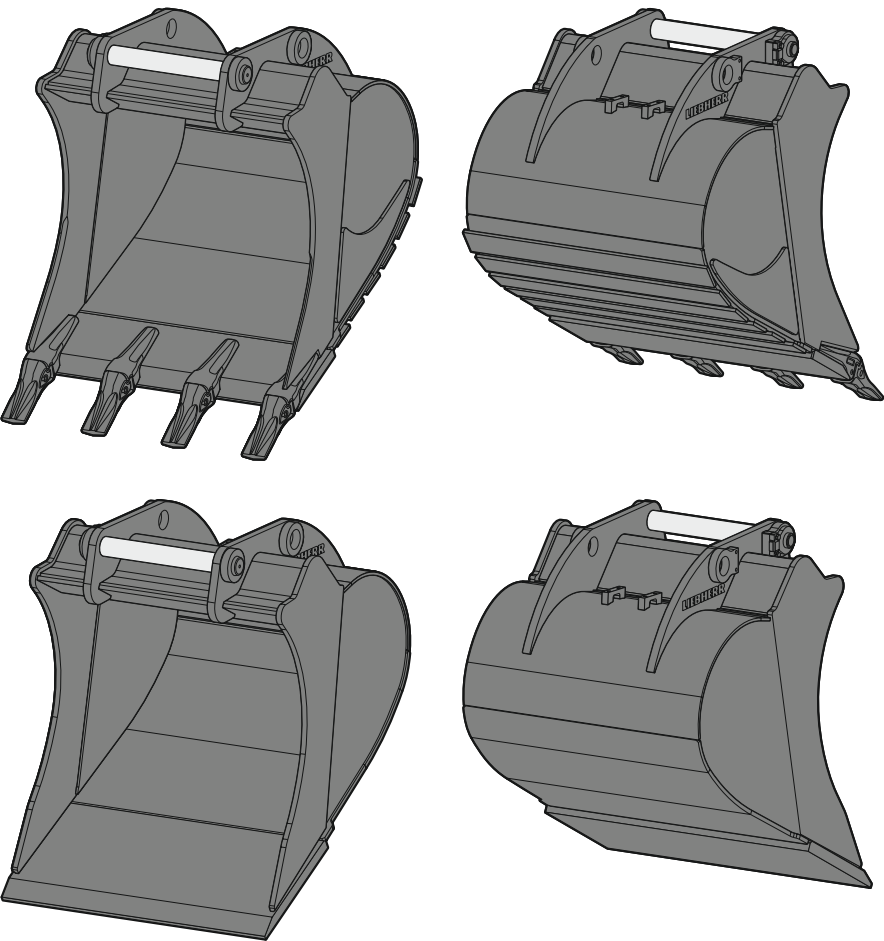

Machine range

Liebherr machines		
Wheeled excavator		A 920
Crawler excavator – Compact		R 926 Compact
Crawler excavator		R 918 – R 922


Other machine makes	
Weight class	approx. 18-21t
(see operating manual for exact specification)	

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	650	850	1,050	1,250	1,400
Capacity	m³	0.55	0.60	0.80	1.00	1.15
Weight	kg	520	560	640	740	795
Teeth		3	3	4	5	5

¹⁾ based on standard backhoe bucket with SWA 48 quick coupler mounting and Z 35 C teeth

Backhoe bucket TL 04-02

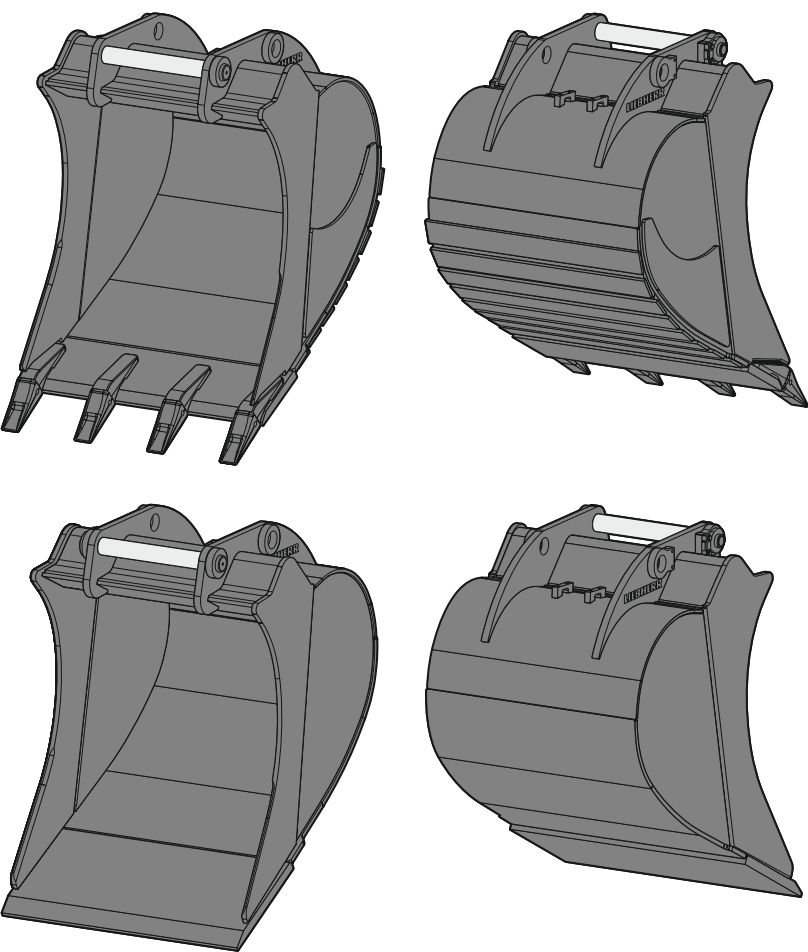

Machine range

Liebherr machines		
Wheeled excavator	A 924 – A 924 Heavy Lift	
Crawler excavator – Compact	R 936 Compact	
Crawler excavator	R 922 – R 928	


Other machine makes	
Weight class	approx. 19–28t
(see operating manual for exact specification)	

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	650	850	1,050	1,250	1,400	1,500	1,600	1,700	1,800
Capacity	m³	0.55	0.75	0.95	1.15	1.35	1.45	1.55	1.85	2.00
Weight	kg	545	630	720	815	875	890	945	1,090	1,133
Teeth		3	3	4	5	5	5	5	6	6

¹⁾ based on standard backhoe bucket with SWA 48 quick coupler mounting and Z 40 C teeth

Backhoe bucket TL 05

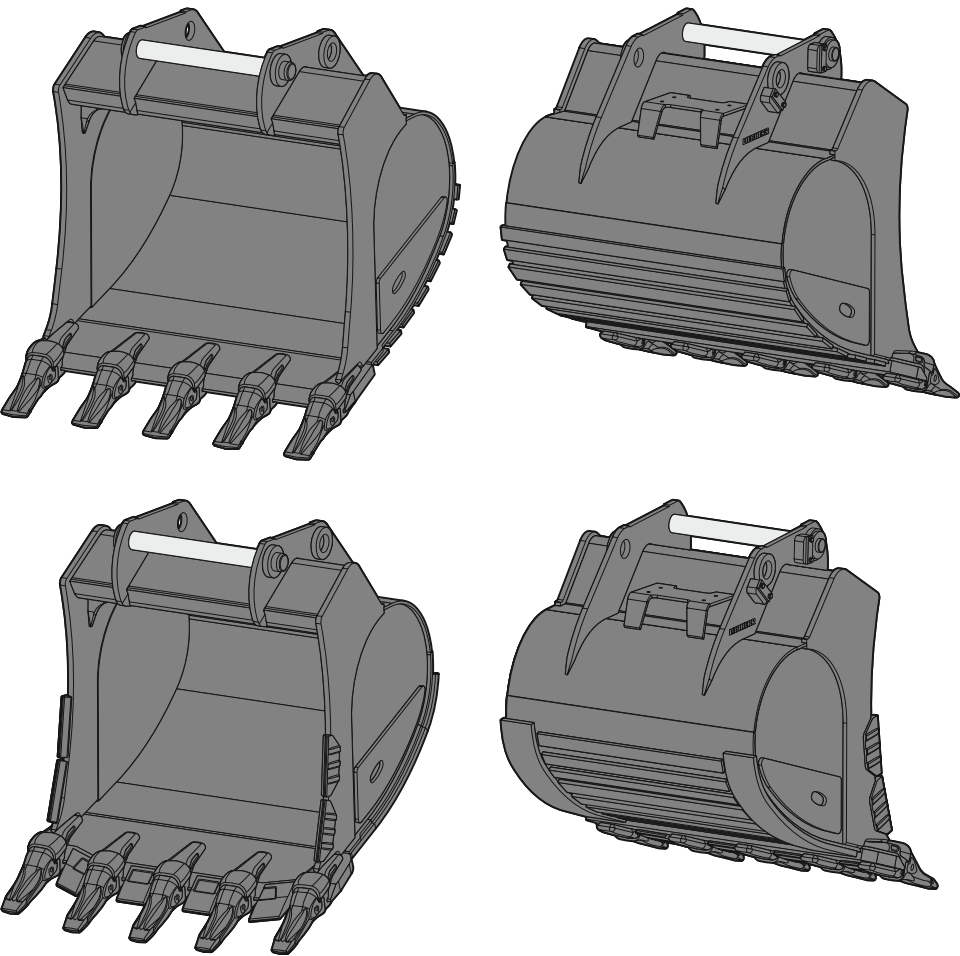

Machine range

Liebherr machines	
Crawler excavator – Compact	R 936 Compact
Crawler excavator	R 930

Other machine makes	
Weight class	approx. 28–35 t
(see operating manual for exact specification)	


Dimensions¹⁾ / weights¹⁾

Cutting width	mm	800 ²⁾	1,050	1,250	1,400	1,550	1,650	1,650
Capacity	m³	0.70	1.00	1.25	1.45	1.60	1.75	2.15
Weight	kg	810	870	990	1,050	1,130	1,180	1,270
Teeth		3	4	5	5	5	5	5

¹⁾ based on standard backhoe bucket with SWA 66 quick coupler mounting and Z 50 C teeth

²⁾ for SWA 66 quick coupler mounting only

Backhoe bucket TL 06

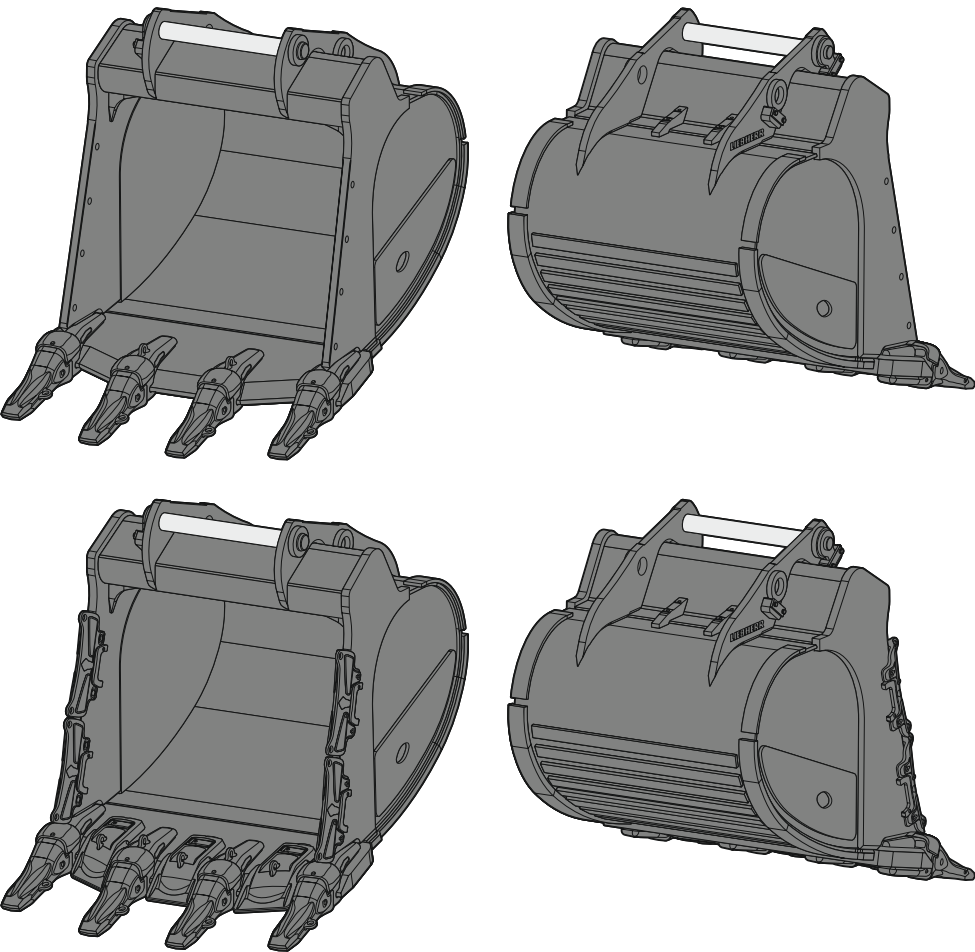

Machine range

Liebherr machines	
Crawler excavator	R 934 - R 945

Other machine makes	
Weight class	approx. 35-45 t
(see operating manual for exact specification)	


Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,050 ²⁾	1,200	1,350	1,500	1,600	1,600	1,650	1,800	1,800	1,850
Capacity	m³	1.00	1.25	1.50	1.75	2.00	2.15	2.00	2.50	2.75	3.00
Weight	kg	1,125	1,270	1,355	1,440	1,640	1,700	1,600	1,830	1,880	1,940
Teeth		4	4	4	4	5	5	5	5	5	6

¹⁾ based on standard backhoe bucket with SWA 66 quick coupler mounting and Z 50 C teeth

²⁾ for SWA 66 quick coupler mounting only

Backhoe bucket TL 07

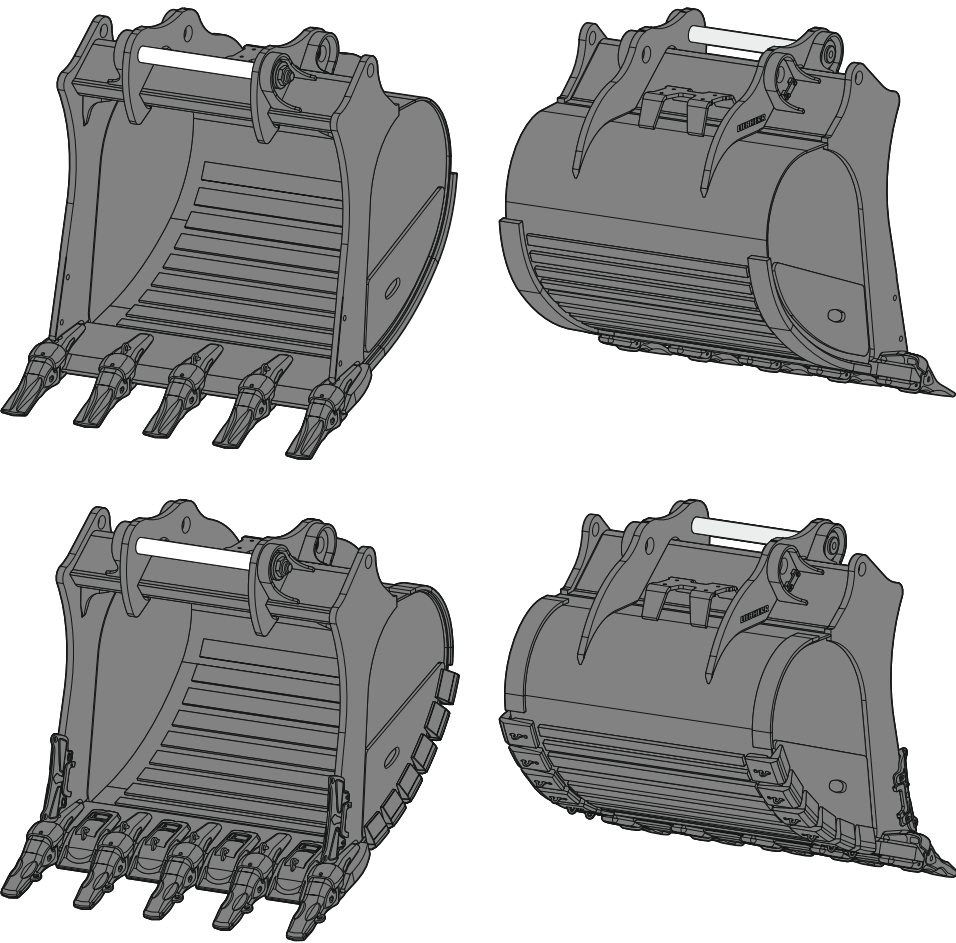

Machine range

Liebherr machines	
Crawler excavator	R 956 - R 960 SME


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 50-60 t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,350	1,550	1,750	1,950	1,950	2,100
Capacity	m³	1.65	2.00	2.35	2.70	3.00	3.30
Weight	kg	2,200	2,360	2,510	2,770	2,840	2,940
Teeth		3	4	4	5	5	5

¹⁾ based on standard backhoe bucket with SWA 77 quick coupler mounting and Z 70 C teeth

Backhoe bucket TL 08

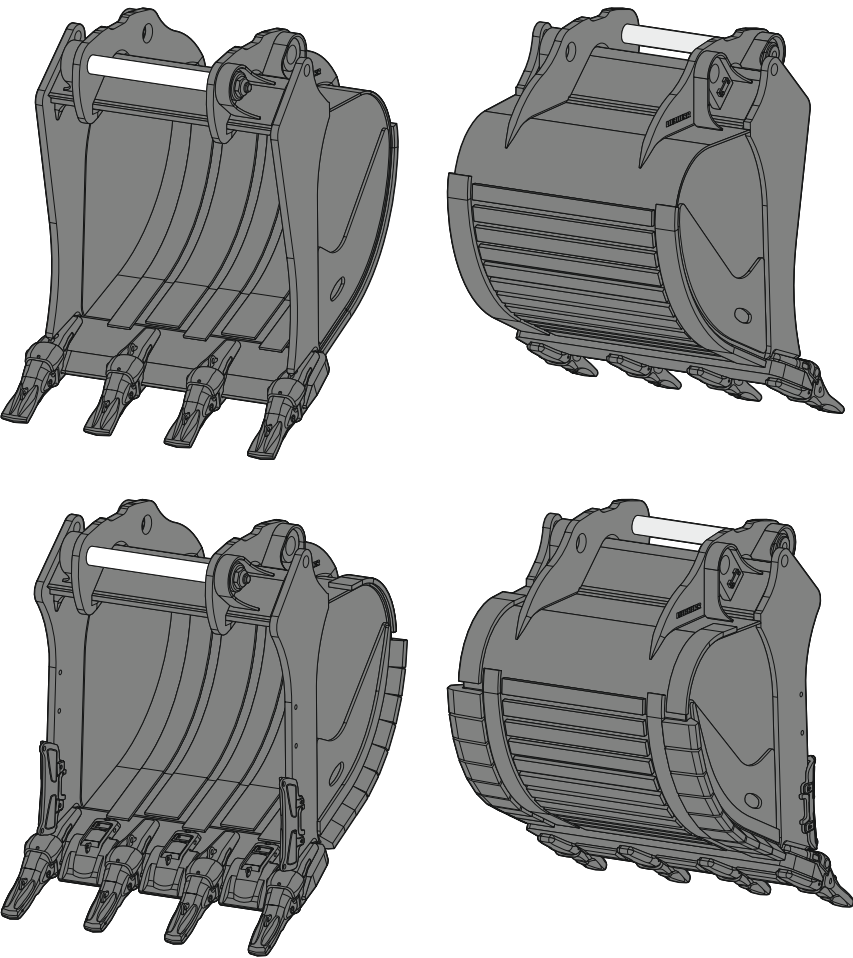

Machine range

Liebherr machines	
Crawler excavator	R 972 - R 978 SME


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 60-80 t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,400	1,700	1,950	2,150	1,950	2,150	2,250	2,450
Capacity	m³	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50
Weight	kg	2,465	2,820	3,100	3,320	3,560	3,780	3,935	4,190
Teeth		3	4	5	5	5	5	5	6

¹⁾ based on standard backhoe bucket with direct mounting, straight cutting edge and Z 70 C teeth

Backhoe bucket TL 09

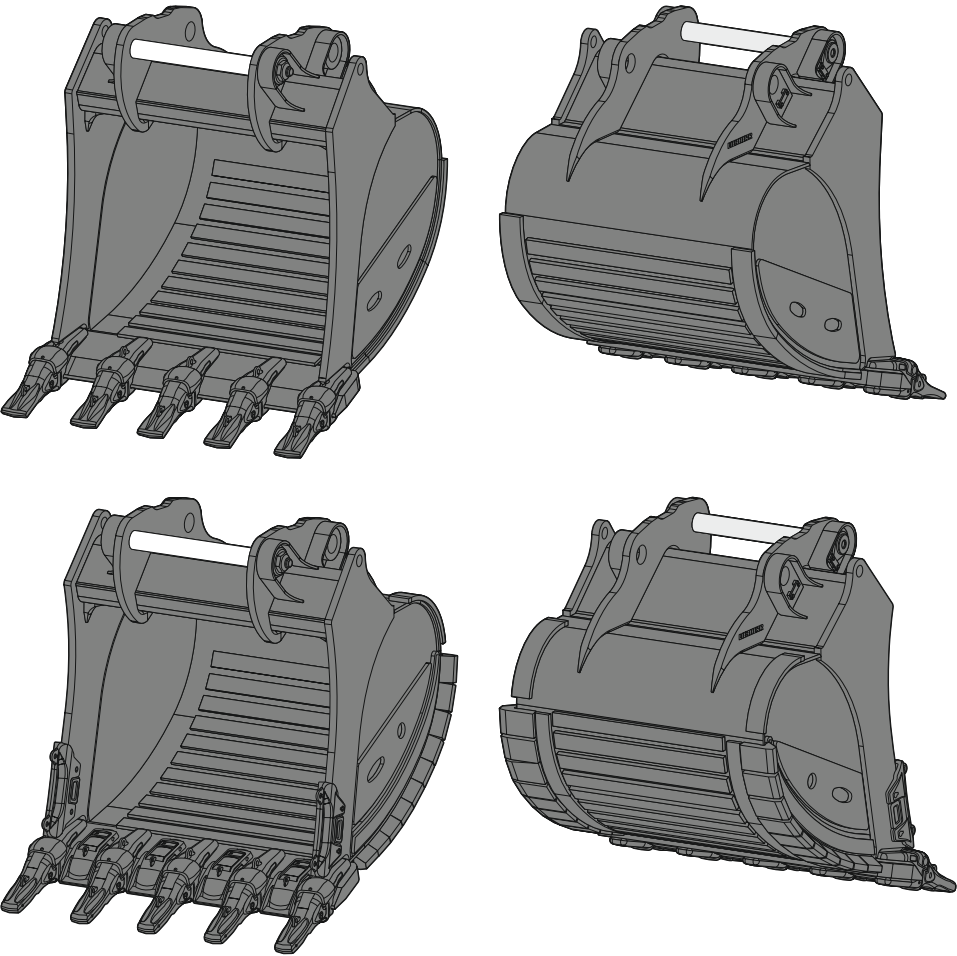

Machine range


Liebherr machines				Other machine makes			
Crawler excavator		R 992 - R 998 SME		Weight class (see operating manual for exact specification)		approx. 80-100 t	

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,450	1,800	2,000	2,200	2,200	2,300	2,300	2,350 ²⁾	2,500 ²⁾
Capacity	m³	2.60	3.60	4.10	4.50	5.20	5.60	6.20	6.20	6.80
Weight	kg	3,750	4,350	4,700	5,100	5,300	5,550	5,800	6,320	6,600
Teeth		3	4	4	5	5	5	5	5	5

¹⁾ based on standard backhoe bucket with direct mounting, straight cutting edge, HD and Z 90 C teeth
²⁾ based on standard backhoe bucket with direct mounting, straight cutting edge, HD and Z 100 C teeth

2in1 bucket HTL 01

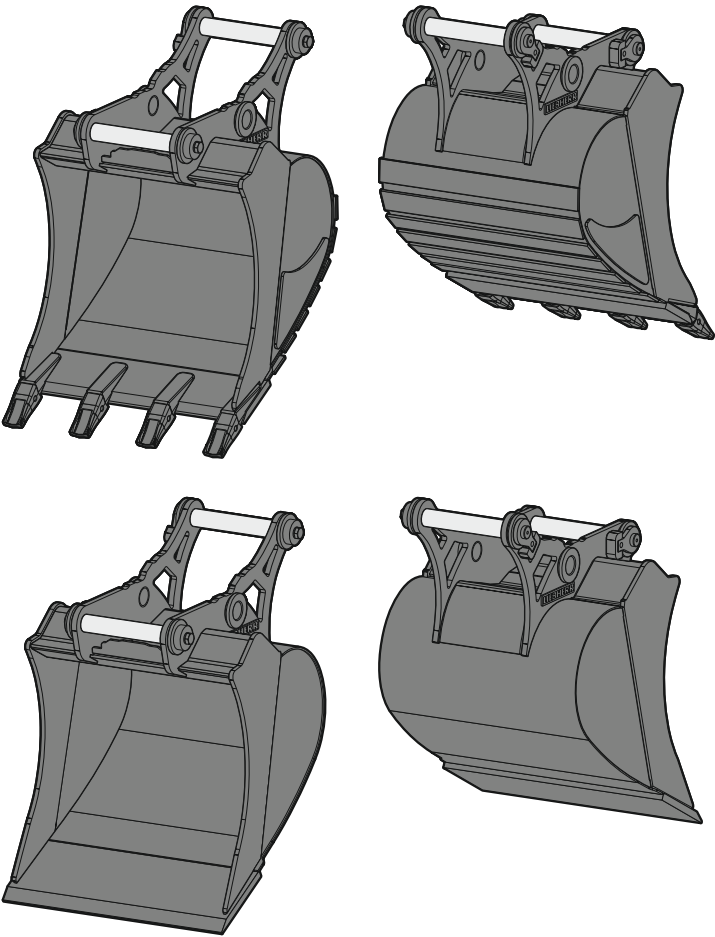

Machine range


Liebherr machines		Other machine makes	
Wheeled excavator - Compact	A 909 Compact - A 912 Compact	Weight class (see operating manual for exact specification)	approx. 10-12t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	300 ²⁾	400 ²⁾	450	550	650	850	950
Capacity	m³	0.15	0.20	0.17	0.22	0.27	0.38	0.44
Weight	kg	221	234	210	237	252	288	303
Teeth		2	3	3	3	4	4	4

¹⁾ based on standard 2in1 bucket with SWA 33 quick coupler mounting and UNI-25-2C teeth
²⁾ limited digging depth due to mounting for SWA 33 quick coupler

2in1 bucket HTL 02

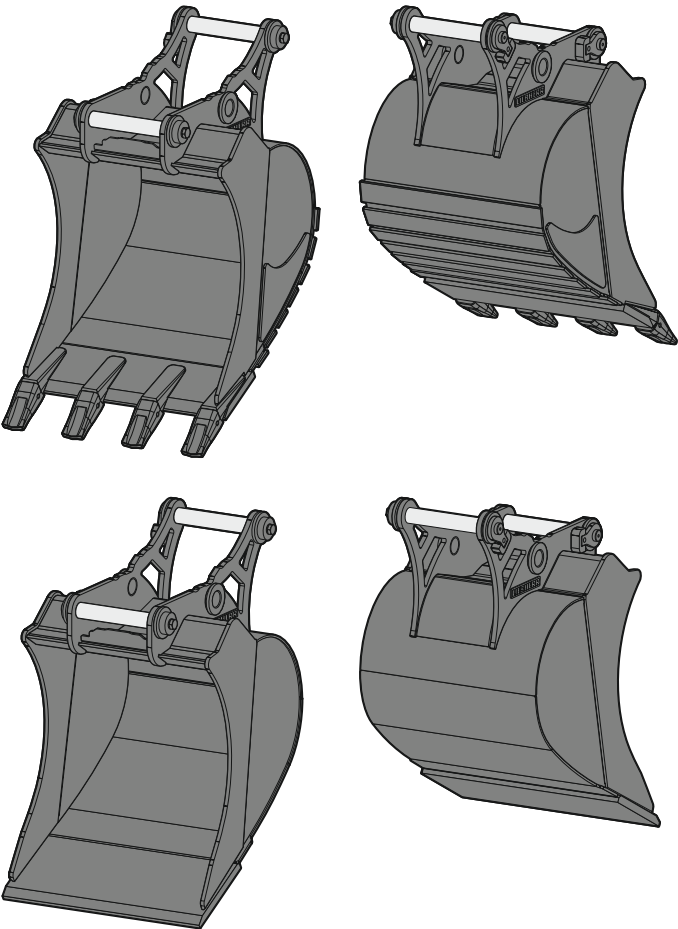

Machine range

Liebherr machines	
Wheeled excavator – Compact	A 913 Compact – A 916 Compact
Wheeled excavator	A 914
Crawler excavator – Compact	R 914 Compact

Other machine makes	
Weight class	approx. 13-15t
(see operating manual for exact specification)	

Dimensions¹⁾ / weights¹⁾


Cutting width	mm	300 ²⁾	400 ²⁾	500 ³⁾	650	850	1,050	1,250
Capacity	m ³	0.17	0.24	0.32	0.36	0.50	0.65	0.80
Weight	kg	284	291	287	321	371	416	465
Teeth		2	2	3	3	4	4	5

¹⁾ based on standard 2in1 bucket with SWA 33 quick coupler mounting and UNI-35-3C teeth

²⁾ limited digging depth due to mounting for SWA 33 quick coupler

³⁾ limited digging depth due to mounting for SWA 48 quick coupler

2in1 bucket HTL 03

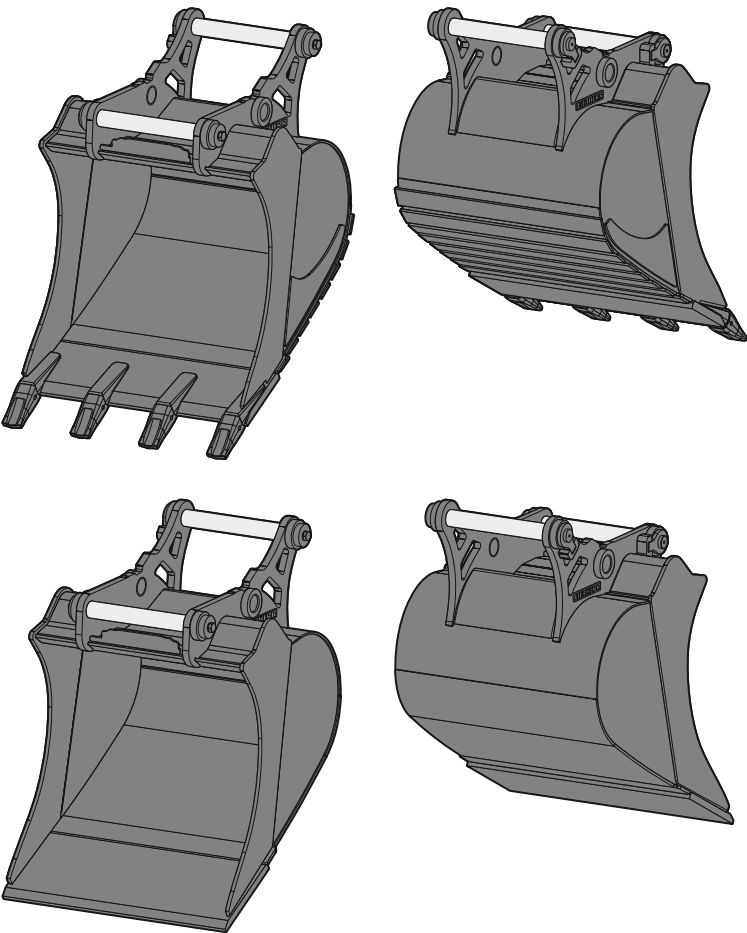

Machine range

Liebherr machines	
Wheeled excavator – Compact	A 918 Compact
Wheeled excavator	A 916 – A 918
Crawler excavator – Compact	R 920 Compact
Railroad excavator	A 922 Rail, A 924 Rail

Other machine makes	
Weight class (see operating manual for exact specification)	approx. 16-19t

Dimensions / weights

Cutting width	mm	300 ^{1) 3)}	400 ^{1) 3)}	500 ^{2) 4)}	650 ²⁾	850 ²⁾	1,050 ²⁾	1,250 ²⁾
Capacity	m ³	0.17	0.24	0.32	0.42	0.60	0.80	0.95
Weight	kg	280	290	413	450	510	584	628
Teeth		2	2	3	3	4	4	5


¹⁾ based on standard 2in1 bucket with SWA 33 quick coupler mounting and UNI-35-3C teeth

²⁾ based on standard 2in1 bucket with SWA 48 quick coupler mounting and UNI-35-3C teeth

³⁾ limited digging depth due to mounting for SWA 33 quick coupler

⁴⁾ limited digging depth due to mounting for SWA 48 quick coupler

2in1 bucket HTL 04-01

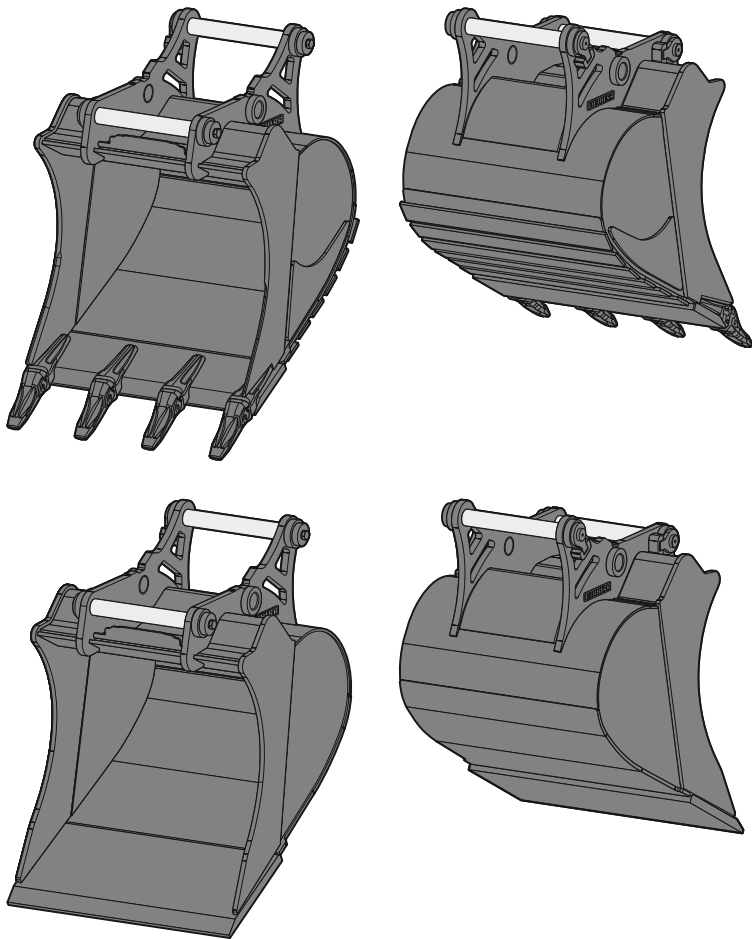

Machine range


Liebherr machines		Other machine makes	
Wheeled excavator	A 920	Weight class	approx. 18-21t
Crawler excavator – Compact	R 926 Compact	(see operating manual for exact specification)	
Crawler excavator	R 918 – R 922		

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	650	850	1,050	1,250	1,400
Capacity	m³	0.55	0.60	0.80	1.00	1.15
Weight	kg	587	627	707	807	526
Teeth		3	3	4	5	5

¹⁾ based on standard 2in1 bucket with SWA 48 quick coupler mounting and Z 35 C teeth

2in1 bucket HTL 04-02

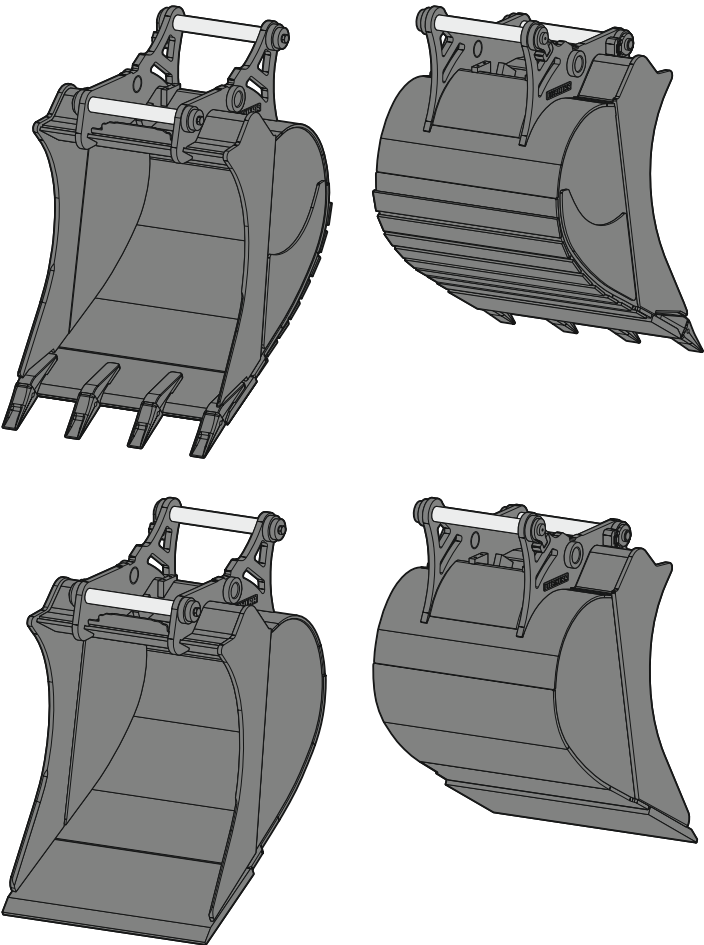

Machine range

Liebherr machines		Other machine makes	
Wheeled excavator	A 924 – A 924 Heavy Lift	Weight class	approx. 19–28t
Crawler excavator – Compact	R 936 Compact	(see operating manual for exact specification)	
Crawler excavator	R 922 – R 928		


Dimensions¹⁾ / weights¹⁾

Cutting width	mm	650	850	1,050	1,250	1,400	1,500	1,600	1,700	1,800
Capacity	m³	0.55	0.75	0.95	1.15	1.35	1.45	1.55	1.85	2.00
Weight	kg	612	697	787	882	942	978	1,016	1,179	1,223
Teeth		3	3	4	5	5	5	5	6	6

¹⁾ based on standard 2in1 bucket with SWA 48 quick coupler mounting and Z 40 C teeth

Universal buckets UL 02

Optimal in combination with a tilt unit or a tiltrotator

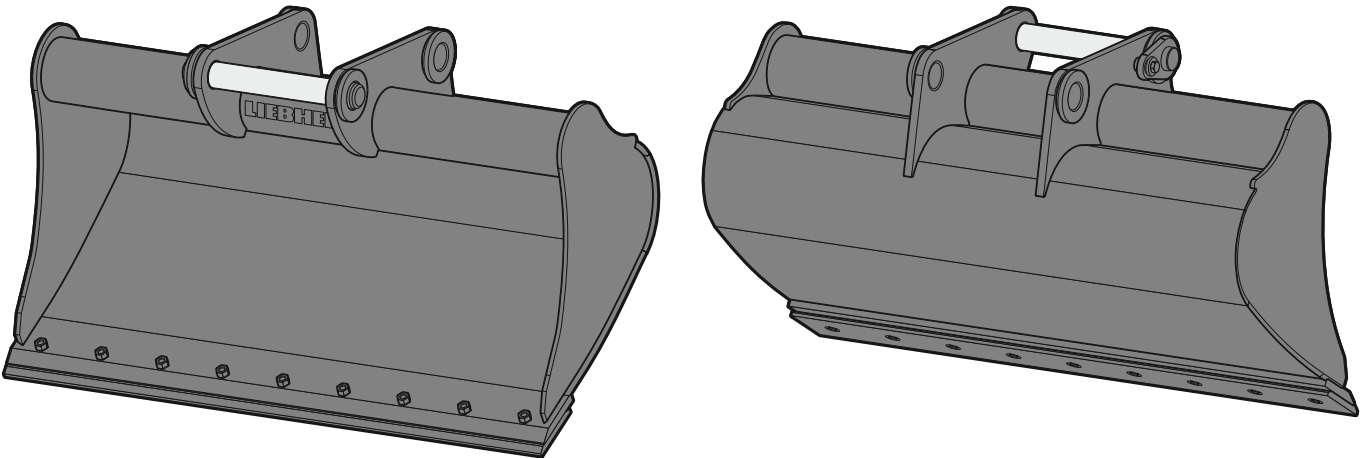

Machine range

Liebherr machines		
Wheeled excavator - Compact		A 913 Compact - A 918 Compact
Wheeled excavator		A 914 - A 918
Crawler excavator - Compact		R 914 Compact

Other machine makes	
Weight class	approx. 13-18t
(see operating manual for exact specification)	



Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,400
Capacity	m ³	0.40
Weight	kg	227

¹⁾ based on standard universal bucket with SWA 33 quick coupler mounting

Universal buckets UL 03

Optimal in combination with a tilt unit or a tiltrotator

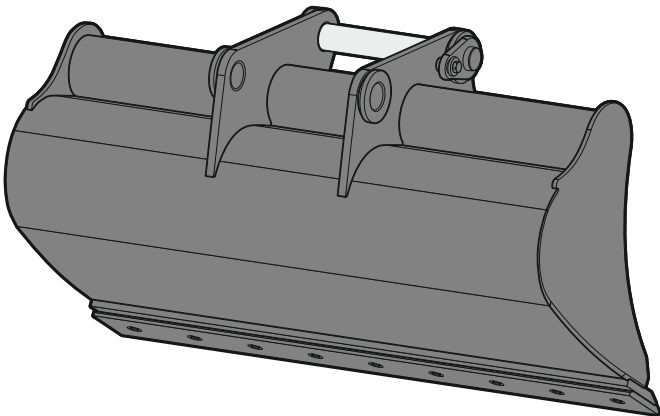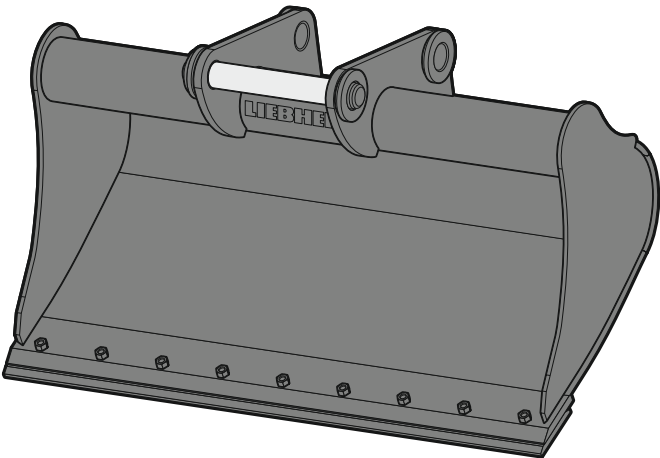

Machine range

Liebherr machines		
Wheeled excavator - Compact	A 913 Compact - A 918 Compact	
Wheeled excavator	A 914 - A 918	
Crawler excavator - Compact	R 914 Compact - R 920 Compact	
Railroad excavator	A 922 Rail, A 924 Rail	

Other machine makes		
Weight class		approx. 13-18 t
(see operating manual for exact specification)		


Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,500
Capacity	m³	0.60
Weight	kg	368

¹⁾ based on standard universal bucket with SWA 33 quick coupler mounting

Universal buckets UL 04

Optimal in combination with a tilt unit or a tiltrotator

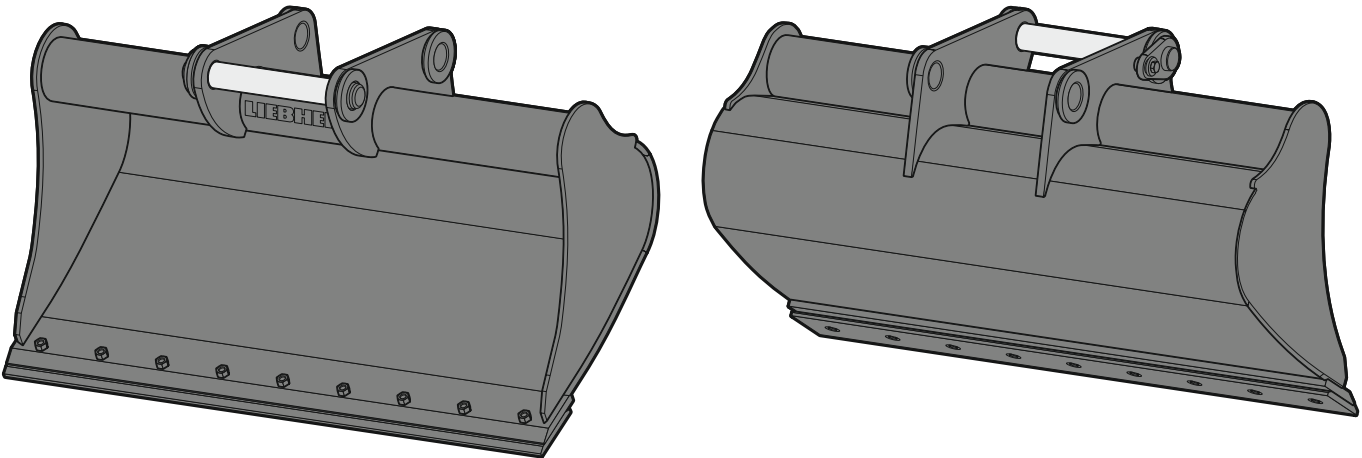

Machine range

Liebherr machines		
Wheeled excavator - Compact		A 918 Compact
Wheeled excavator		A 916 - A 924 Heavy Lift
Crawler excavator - Compact		R 920 Compact - R 926 Compact
Crawler excavator		R 918 - R 928


Other machine makes		
Weight class		approx. 16-26t
(see operating manual for exact specification)		

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,600
Capacity	m ³	1.00
Weight	kg	473

¹⁾ based on standard universal bucket with SWA 48 quick coupler mounting

Ditch cleaning bucket GRL rigid 01

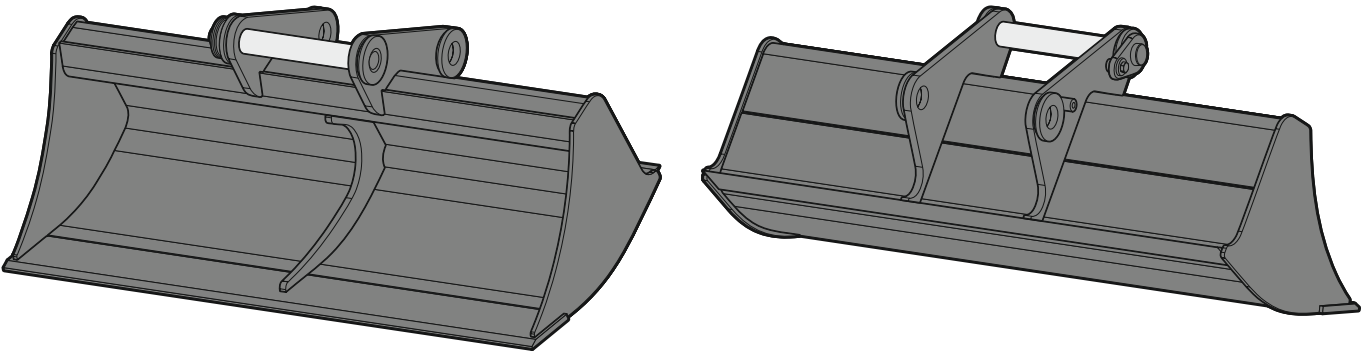

Machine range

Liebherr machines		
Wheeled excavator - Compact		A 909 Compact - A 913 Compact


Other machine makes		
Weight class (see operating manual for exact specification)		approx. 10-12t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,300	1,500
Capacity	m³	0.27	0.33
Weight	kg	194	214

¹⁾ based on ditch cleaning bucket (rigid) with SWA 33 quick coupler mounting and rear edge

Ditch cleaning bucket GRL rigid 02

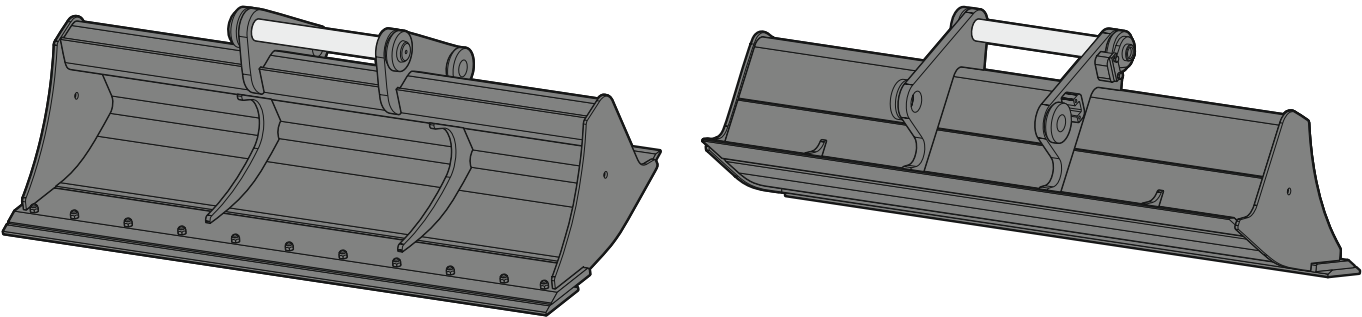

Machine range

Liebherr machines		
Wheeled excavator – Compact		A 914 Compact – A 918 Compact
Wheeled excavator		A 914 – A 918
Crawler excavator – Compact		R 914 Compact – R 920 Compact


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 14–18 t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,500	2,000	2,000
Capacity	m³	0.50	0.48	0.65
Weight	kg	362	351	385

¹⁾ based on ditch cleaning bucket (rigid) with SWA 33 quick coupler mounting and rear edge

Ditch cleaning bucket GRL rigid 02B

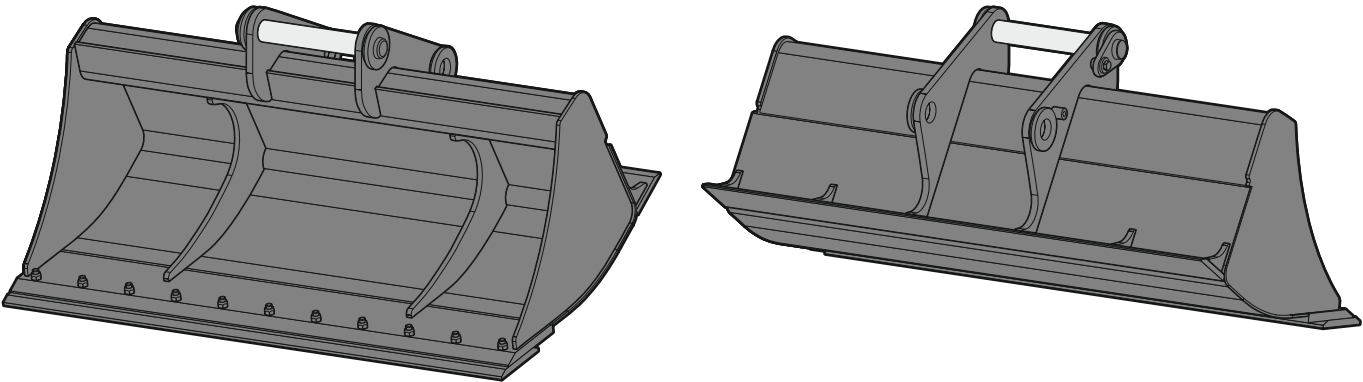

Machine range

Liebherr machines	
Wheeled excavator - Compact	A 914 Compact - A 918 Compact
Wheeled excavator	A 914 - A 918
Railroad excavator	A 922 Rail, A 924 Rail


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 14-18t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	600	800	1,000	1,200	1,400	1,600	1,800	2,000
Capacity	m ³	0.17	0.25	0.30	0.38	0.45	0.50	0.57	0.65
Weight	kg	167	196	225	255	293	330	360	390

¹⁾ based on ditch cleaning bucket (rigid) with SWA 33 quick coupler mounting and rear edge

Ditch cleaning bucket GRL rigid Rail

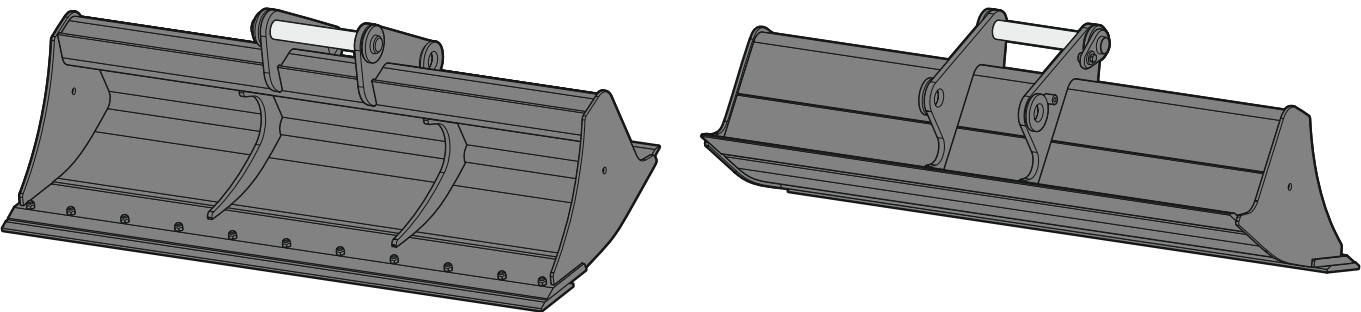

Machine range

Liebherr machines	
Railroad excavator	A 922 Rail, A 924 Rail


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 22-24 t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,600	2,000	2,000
Capacity	m³	0.80	0.48	0.65
Weight	kg	451	351	385

¹⁾ based on ditch cleaning bucket (rigid) – rail with SWA 33 quick coupler mounting and rear edge

Ditch cleaning bucket GRL rigid 03

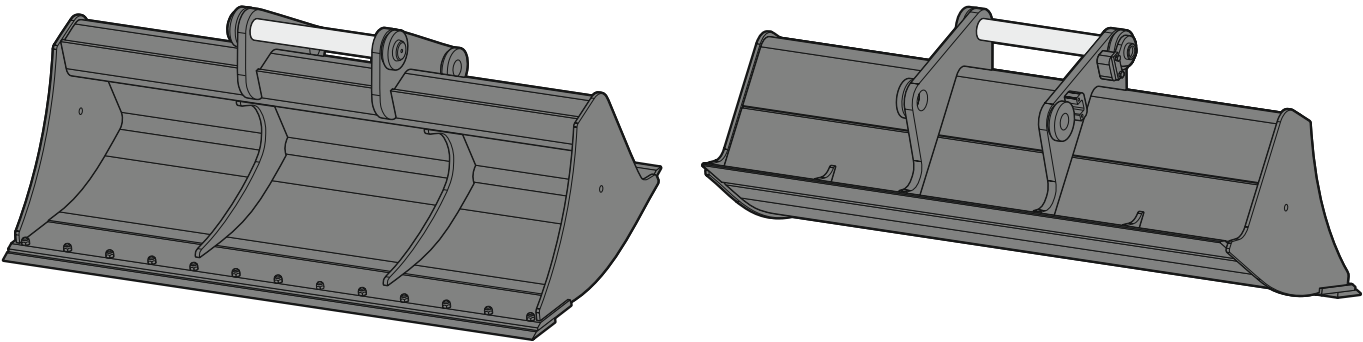

Machine range

Liebherr machines		
Wheeled excavator	A 920	
Crawler excavator	R 918	


Other machine makes		
Weight class		approx. 16-19t
(see operating manual for exact specification)		

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	2,000	2,400
Capacity	m³	0.70	0.85
Weight	kg	522	605

¹⁾ based on ditch cleaning bucket (rigid) with SWA 48 quick coupler mounting and rear edge

Ditch cleaning bucket GRL rigid 04

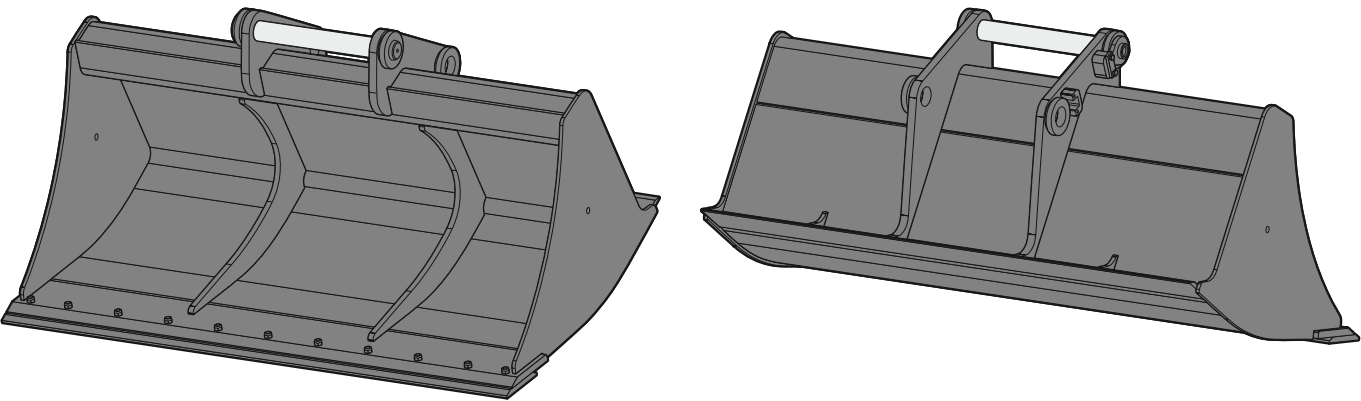

Machine range

Liebherr machines	
Wheeled excavator	A 924 – A 924 Heavy Lift
Crawler excavator – Compact	R 926 Compact
Crawler excavator	R 922 – R 928


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 18-28 t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,500	2,000	2,000	2,400
Capacity	m³	0.50	0.70	1.20	0.85
Weight	kg	425	522	637	605

¹⁾ based on ditch cleaning bucket (rigid) with SWA 48 quick coupler mounting and rear edge

Ditch cleaning bucket GRL rigid 05

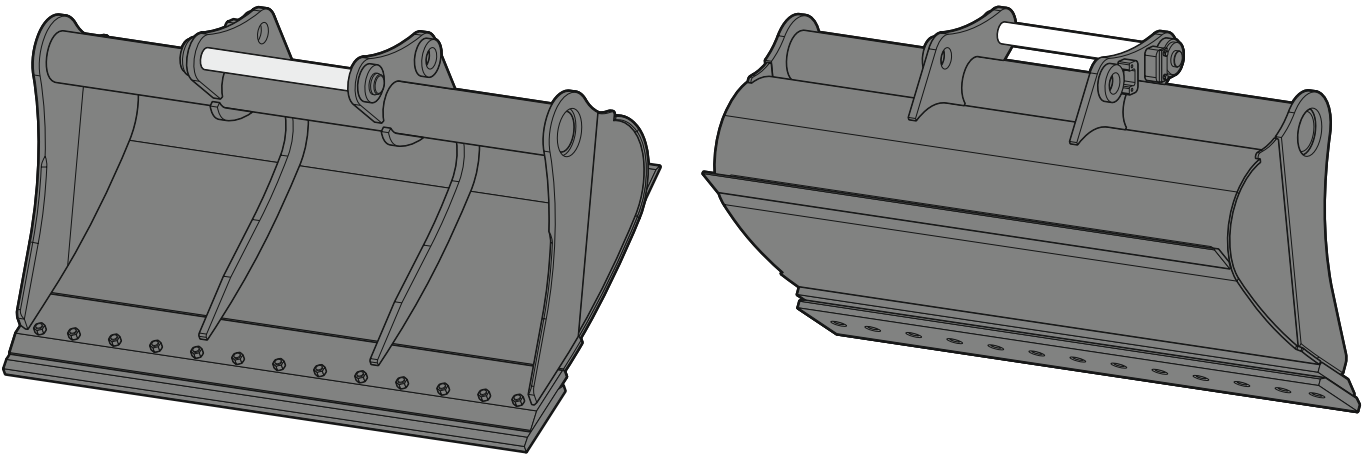

Machine range

Liebherr machines		
Crawler excavator – Compact		R 936 Compact
Crawler excavator		R 930 – R 934


Other machine makes		
Weight class		approx. 28–35 t
(see operating manual for exact specification)		

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	2,000	2,400	2,400
Capacity	m³	0.70	0.85	1.15
Weight	kg	550	639	718

¹⁾ based on ditch cleaning bucket (rigid) with SWA 66 quick coupler mounting and rear edge

Ditch cleaning bucket GRL rigid 06

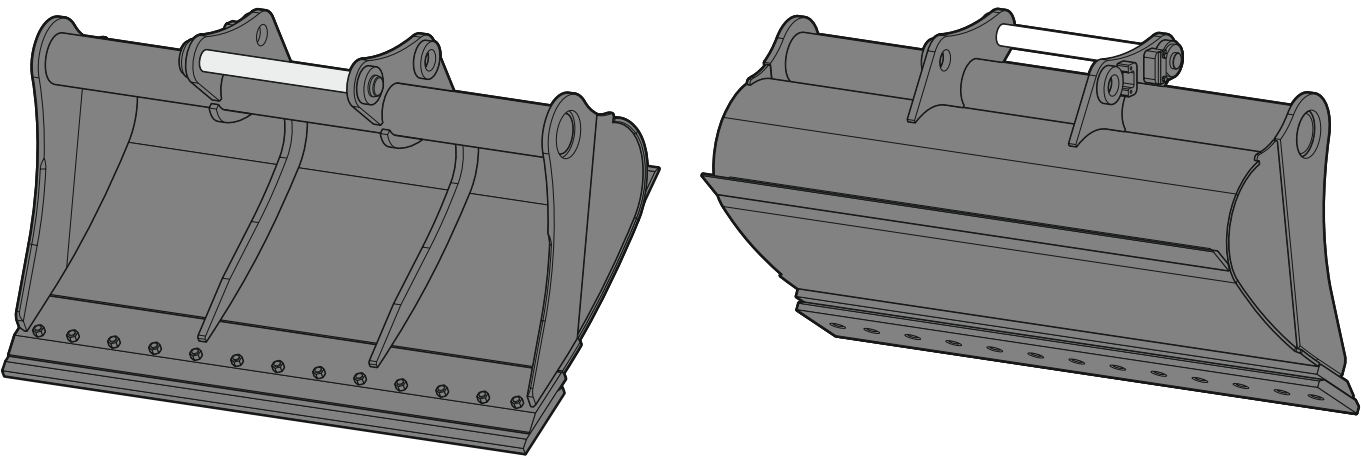

Machine range

Liebherr machines
Crawler excavator | R 938 – R 945


Other machine makes
Weight class | approx. 37-45t
(see operating manual for exact specification)

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	2,200	2,400	2,800	2,800
Capacity	m³	1.65	1.50	2.60	2.90
Weight	kg	1,050	964	1,522	1,561

¹⁾ based on ditch cleaning bucket (rigid) with SWA 66 quick coupler mounting and rear edge

Grading bucket PL 02

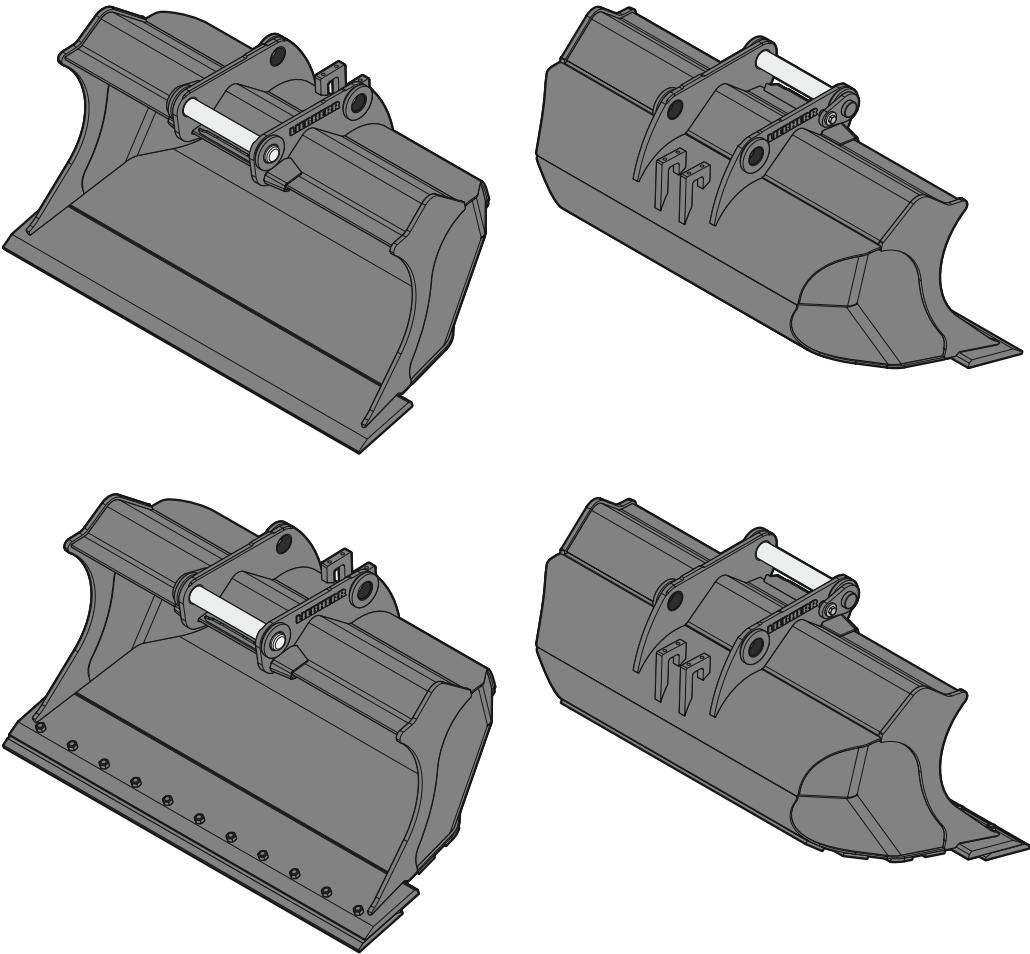

Machine range

Liebherr machines		
Wheeled excavator – Compact		A 909 Compact – A 914 Compact
Wheeled excavator		A 914
Crawler excavator – Compact		R 914 Compact


Other machine makes	
Weight class	approx. 8–15t
(see operating manual for exact specification)	

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,400
Capacity	m ³	0.40
Weight	kg	315

¹⁾ based on standard grading bucket with SWA 33 quick coupler mounting

Grading bucket PL 03

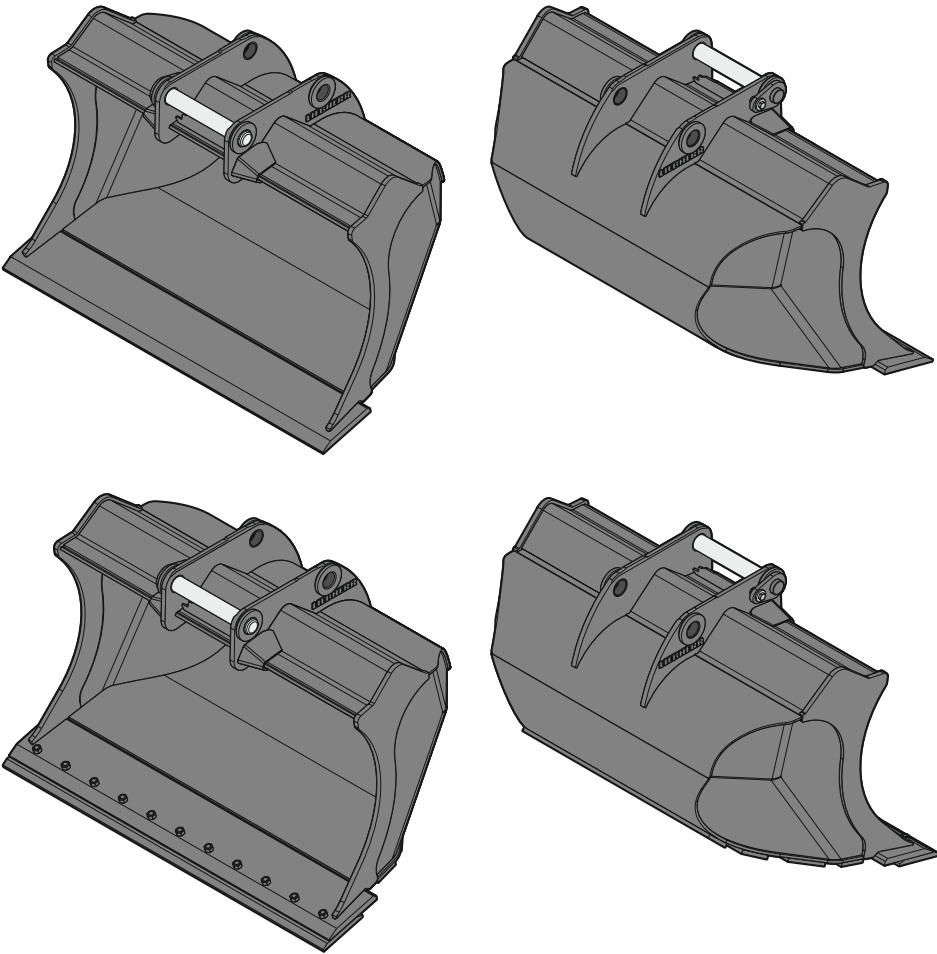

Machine range

Liebherr machines	
Wheeled excavator – Compact	A 916 Compact – A 918 Compact
Wheeled excavator	A 916 – A 918
Crawler excavator – Compact	R 920 Compact
Railroad excavator	A 922 Rail, A 924 Rail


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 15-20t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,400
Capacity	m ³	0.65
Weight	kg	350

¹⁾ based on standard grading bucket with SWA 33 quick coupler mounting

Grading bucket PL 04

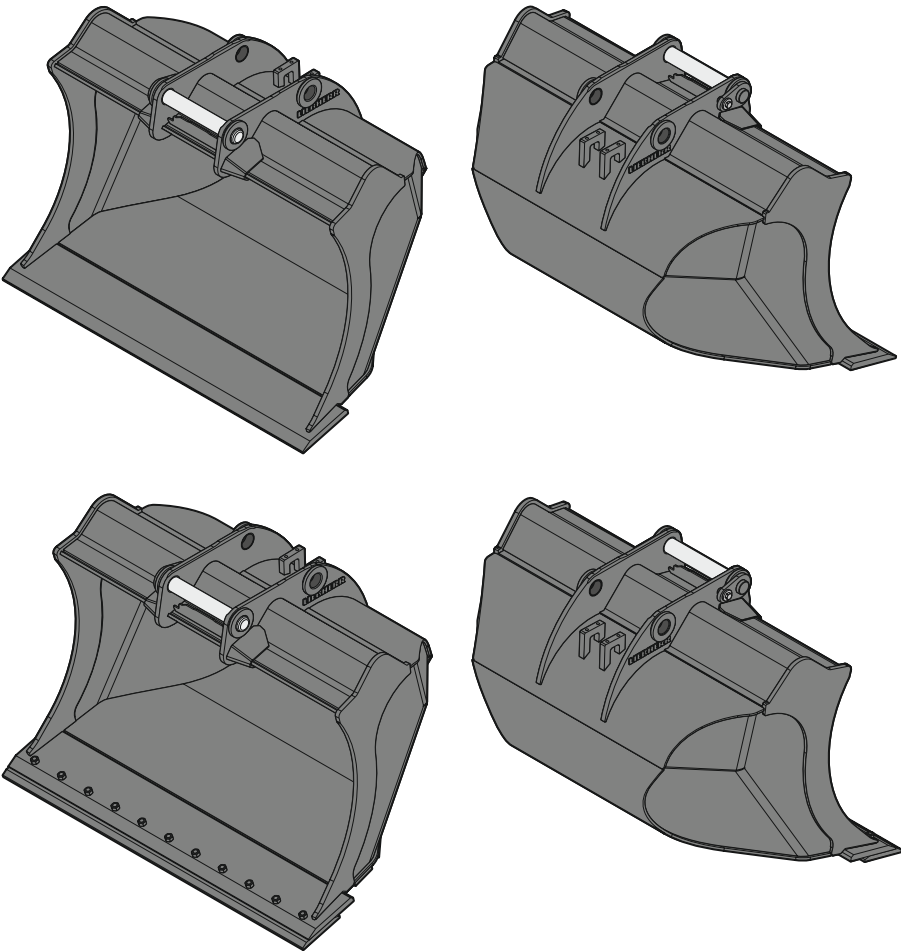

Machine range

Liebherr machines		
Wheeled excavator		A 920 – A 924
Crawler excavator – Compact		R 926 Compact
Crawler excavator		R 918


Other machine makes	
Weight class	approx. 20–25 t
(see operating manual for exact specification)	

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,600
Capacity	m ³	0.90
Weight	kg	510

¹⁾ based on standard grading bucket with SWA 48 quick coupler mounting

Ditch cleaning bucket GRL 80

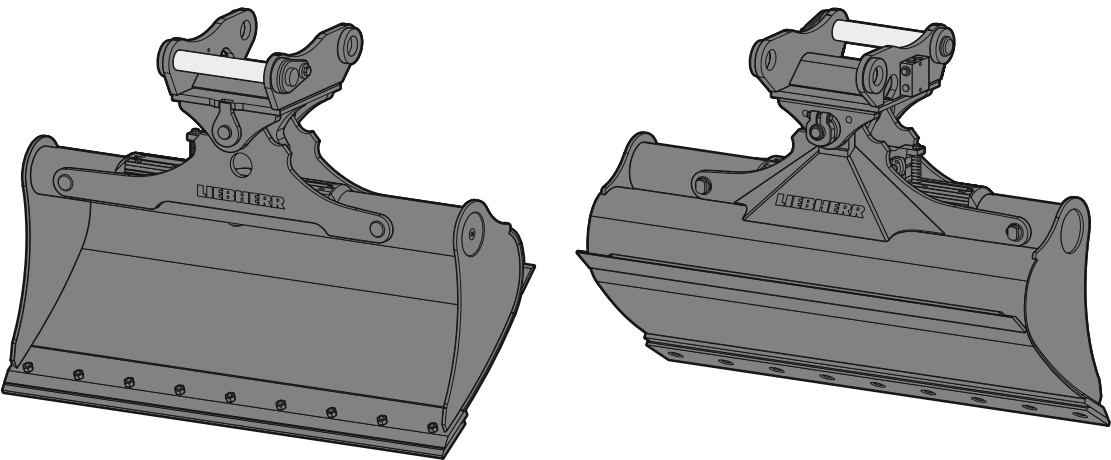

Machine range

Liebherr machines	
Wheeled excavator - Compact	A 909 Compact - A 913 Compact


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 10-13t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,200	1,300	1,500	1,500	1,700	1,700
Capacity	m³	0.29	0.28	0.33	0.36	0.37	0.41
Weight	kg	345	305	335	420	395	440
Tilt angle		2 x 50°	2 x 45°	2 x 45°	2 x 50°	2 x 45°	2 x 50°

¹⁾ based on standard tilting ditch cleaning bucket with SWA 33 quick coupler mounting and rear edge

Ditch cleaning bucket GRL 90

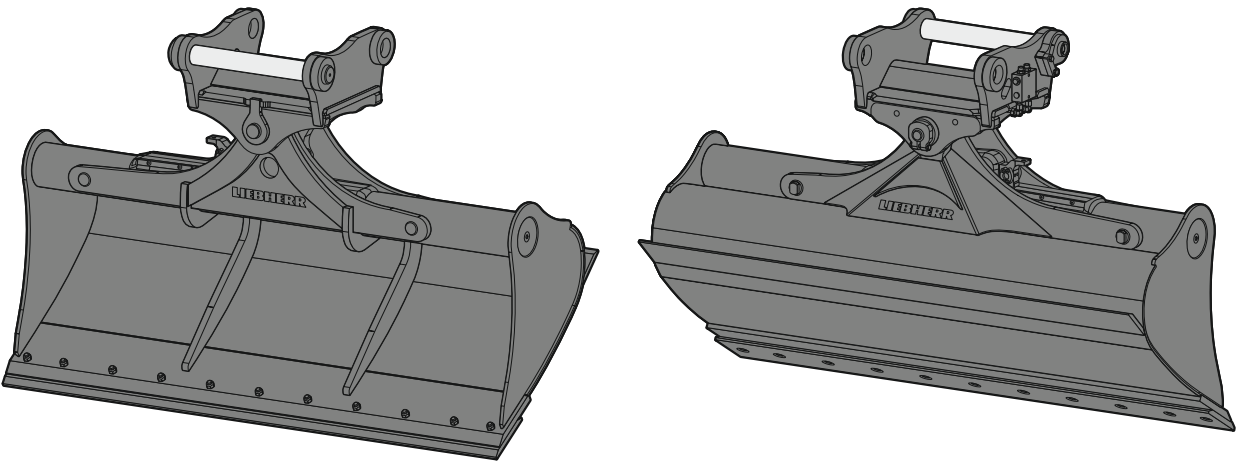

Machine range

Liebherr machines	
Wheeled excavator – Compact	A 914 Compact – A 918 Compact
Wheeled excavator	A 914 – A 924 Heavy Lift
Crawler excavator – Compact	R 914 Compact – R 926 Compact
Crawler excavator	R 918 – R 928
Railroad excavator	A 922 Rail, A 924 Rail


Other machine makes	
Weight class (see operating manual for exact specification)	approx. 14–30t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,600	1,600	2,000	2,000	2,000	2,200	2,200	2,200	2,400	2,400	2,800
Capacity	m³	0.55	0.80	0.50	0.70	1.00	0.80	1.15	1.40	0.85	1.25	1.85
Weight	kg	690	850	695	875	935	910	985	995	890	1,000	1,090
Tilt angle		2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°

¹⁾ based on standard tilting ditch cleaning bucket with SWA 48 quick coupler mounting and rear edge

Ditch cleaning bucket GRL 100

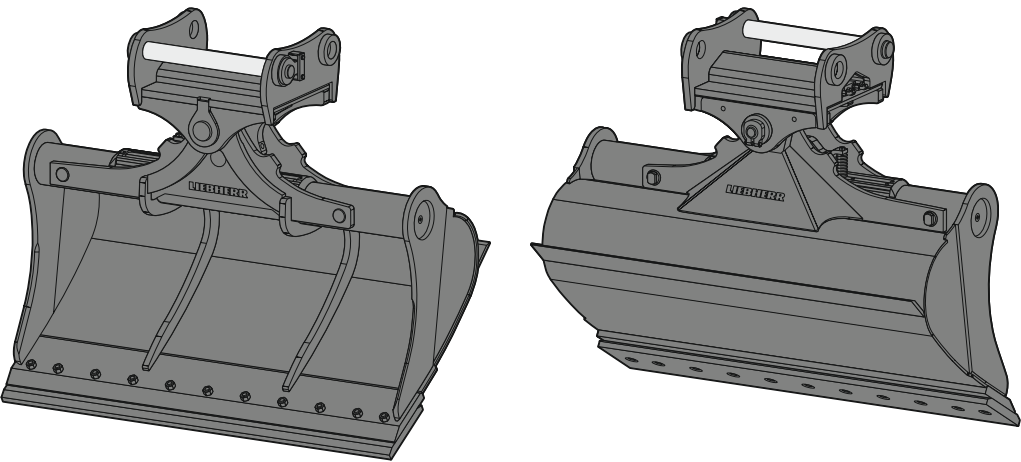

Machine range

Liebherr machines		
Crawler excavator – Compact		R 936 Compact
Crawler excavator		R 930 – R 945


Other machine makes		
Weight class		approx. 25–35 t
(see operating manual for exact specification)		

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	2,000	2,000	2,000	2,200	2,400	2,400
Capacity	m³	0.70	1.20	1.45	1.65	0.85	1.45
Weight	kg	1,375	1,520	1,600	1,675	1,480	1,625
Tilt angle		2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°

¹⁾ based on standard tilting ditch cleaning bucket with SWA 66 quick coupler mounting and rear edge

Tilt bucket SL 80

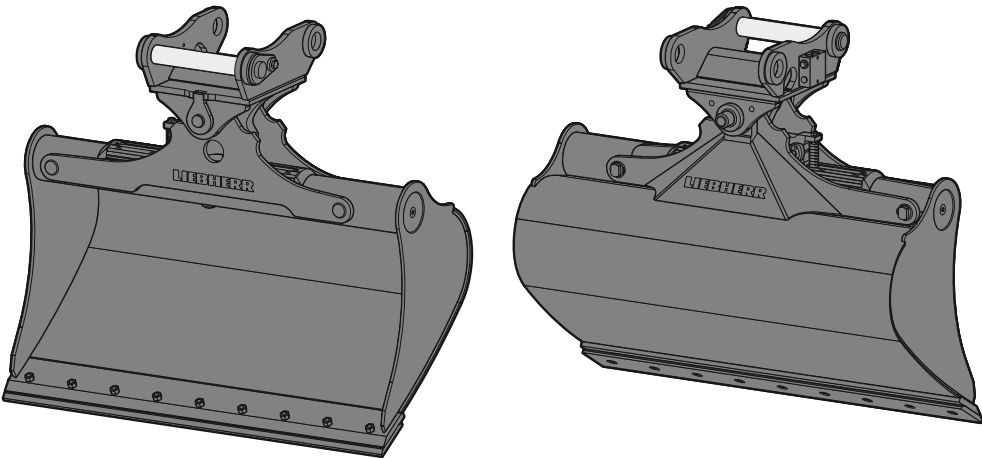

Machine range


Liebherr machines		Other machine makes	
Wheeled excavator - Compact	A 909 Compact - A 913 Compact	Weight class (see operating manual for exact specification)	approx. 10-14t

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,400
Capacity	m³	0.40
Weight	kg	420
Tilt angle		2 x 50°

¹⁾ based on standard tilt bucket with SWA 33 quick coupler mounting

Tilt bucket SL 90

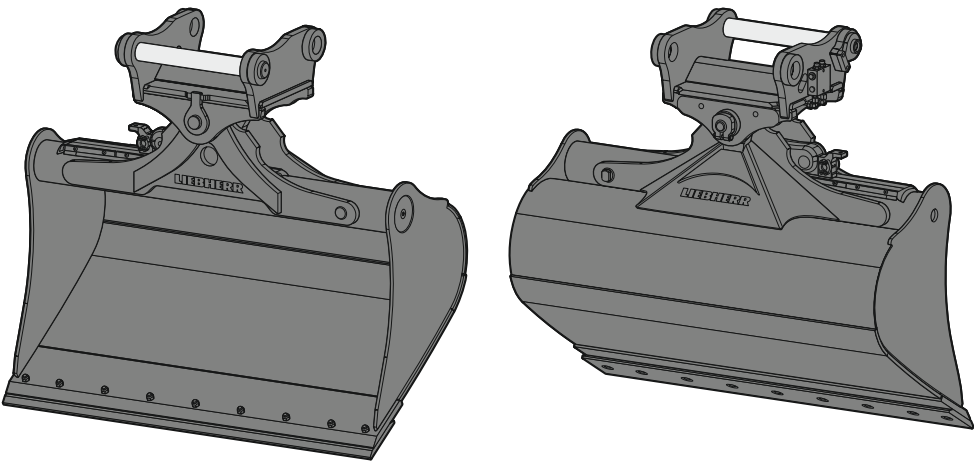

Machine range

Liebherr machines	
Wheeled excavator - Compact	A 914 Compact - A 918 Compact
Wheeled excavator	A 914 - A 924 Heavy Lift
Crawler excavator - Compact	R 914 Compact - R 926 Compact
Crawler excavator	R 918 - R 928
Railroad excavator	A 922 Rail, A 924 Rail


Other machine makes	
Weight class	approx. 14-26t
(see operating manual for exact specification)	

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,400	1,500	1,500	1,600	1,600	1,600	1,600
Capacity	m³	0.55	0.60	1.20	0.80	1.00	1.35	1.55
Weight	kg	715	680	970	820	890	970	1,030
Tilt angle		2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°

¹⁾ based on standard tilt bucket with SWA 48 quick coupler mounting

Tilt bucket SL 100

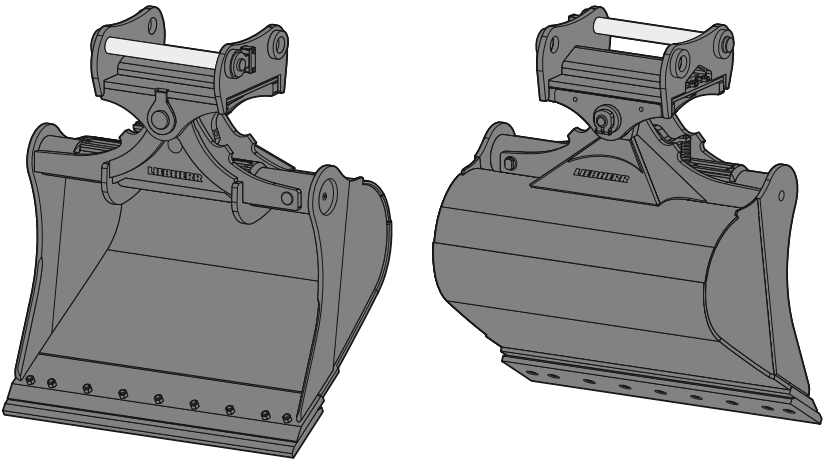

Machine range

Liebherr machines		Other machine makes	
Crawler excavator – Compact	R 936 Compact	Weight class	approx. 25–35 t
Crawler excavator	R 930 – R 945	(see operating manual for exact specification)	

Dimensions¹⁾ / weights¹⁾

Cutting width	mm	1,600	1,600	1,700 ²⁾	1,800	1,800
Capacity	m³	1.45	1.75	1.85	1.60	2.00 ²⁾
Weight	kg	1,520	1,630	1,800	1,610	1,860
Tilt angle		2 x 50°	2 x 50°	2 x 50°	2 x 50°	2 x 50°

¹⁾ based on standard tilt bucket with SWA 66 quick coupler mounting
²⁾ HD version

Guide values for bulk goods weights

	t/m³
Topsoil	1.10
Earth	1.30
dry	1.30
wet excavated	1.60
Clay / gravel	1.40
dry	1.40
wet	1.60

	t/m³
Gravel	1.50
crushed stone	1.50
dry	1.60
moist	1.90
Sand	1.50
dry	1.50
wet	1.90

	t/m³
Sandstone	1.60
Sand / clay	1.60
Limestone	1.60
Gravel and sand	1.70
dry	1.70
wet	2.00

UNI tooth system

The low construction height and the narrow, self-sharpening tooth shape makes the Liebherr UNI system ideal for best digging with low penetration resistance. Highly wear-resistant steel assures the familiar reliability even under tough conditions that has already proven its worth among wheel loaders. The side clamping sleeve locking mechanism enables simple and efficient tooth replacement.



C tooth

Features	Symmetrical cap with front cut-away section, self-sharpening, can be rotated.
Areas of use	For light to medium ground hardness (loamy sand, gravel, soft brown coal, soft / medium clay etc.)



CR tooth

Features	Cap with large material volume for long service life when used in wear-intensive operations.
Areas of use	For particularly abrasive ground (granite, basalt, sandstone, stone containing quartz etc.)



R tooth

Features	Pointed tooth for good penetration, can be rotated.
Areas of use	For very hard and frozen ground, rock that is difficult to break (limestone, slate, brown coal, mining of wall gravel etc.)



Tooth holder (single arm)

For precise leveling.

Z tooth system

The optimised tooth design leads to an increase in efficiency on the construction site with the Liebherr Z system. The low digging resistance, the self-sharpening tooth shape as well as easy tooth replacement without hammering are arguments for the Liebherr Z system. The teeth are made from high tensile steel, which is distinguished by the highest level of wear resistance and long service life.



C tooth

Features	The conical shape helps to achieve very good penetration in cohesive ground.
Areas of use	Types of ground that are easy to break up and ground that is little cohesive (e.g. loose, loamy sand, fine to medium gravel, moist and soft clay)



CL tooth

Features	Long, drawn-out point with sharp edge for very good penetration properties.
Areas of use	Medium and cohesive ground to ground with average plasticity (e.g. hard, loamy sand, medium clay, fine to medium clay)



CR tooth

Features	The long, drawn-out point enables very good penetration in aggregate material. The broad and thick base of the tooth facilitates a long service life under wear-intensive conditions.
Areas of use	Abrasive ground, rock (e.g. granite, basalt, sandstone; mainly in connection with front shovel deployment)



R tooth

Features	Low cutting width and large wear volume result in high specific penetration force and service life.
Areas of use	Heavy to break ground, particularly abrasive ground, rock (e.g. limestone, slate, very hard clay, brown coal)



P tooth

Features	Pointed tooth with good penetration capability even in hard stone.
Areas of use	Very hard, frozen ground, rock that is very difficult to break (e.g. well set, unweathered shale)



PF tooth

Features	Fork tip with outstanding penetration in extremely compact ground. Can be fitted to corners of bucket as a supplement to the P-points in order to maintain tilt angle.
Areas of use	Very hard and frozen ground, rock that is difficult to break (e.g. well set, unweathered shale, heavy ore with medium and weak cracks, slag heaps from steelworks)



Tooth holder (single arm)

For precise leveling.



Standard tooth holder (two arm)





For tough operations, particularly with intermediate tooth segments (shrouds).
--



Shrouds


Reduces exposure of the bucket to impacts and abrasion, extending its wear life.
--

Suitable applications


	Backhoe bucket - with teeth	Backhoe bucket - with cutting edge	2in1 bucket - with teeth	2in1 bucket - with cutting edge
				
Excavation of topsoil	•	••	•	••
Excavation of loosened material	•••	•••	•••	•••
Excavation of hard soil	•••	•	•••	•
Loading work	•••	•••	•••	•••
Undermining and exposing cables and pipes	○	•••	○	•••
Picking up and moving awkward items, large stones	•••	•••	•••	•••
Quarrying	•••	••	•••	••
Releasing and loosening hard and abrasive material	•••	○	•••	○
Pulling	○	••	○	••
Modelling earth walls	○	○	○	○
Grading work	○	••	○	••
Excavation of ditches with appropriate profile	○	••	○	••
Preparation of embankments	○	•	○	•
Work in the shoring	•••	•••	•••	•••
Filling foundations or walls	•••	•••	•••	•••
Working on track bed	••	••	••	••
Precise installation on sand of lines and pipes	•	••	•	••
Precise installation on sand of lines and pipes using tiltrotator	•	••	•	••
Working at a long reach				
(stick extension, embankment or MultiUser equipment)	•••	•••	•••	•••
Working in combination with a tilt unit (LiTiU)	•••	•••	•••	•••
Working in combination with a tiltrotator	•••	•••	•	•

- = very good
- = good
- = satisfactory
- = sufficient or not suitable


Universal bucket




Ditch cleaning bucket (rigid)
- with rear edge




Grading bucket



Ditch cleaning bucket
- with rear edge
- tiltable



Tilt bucket
- tiltable



•••	•••	•	•••	•••
••	••	••	••	••
○	○	○	○	○
•••	•••	•	•••	•••
•	•	••	•	•
•	•	•	○	○
○	○	○	○	○
○	○	○	○	○
•••	•••	•••	•••	•••
•	•	•••	•••	•••
••	••	•••	•••	•••
••	••	••	•••	•••
••	••	••	○	•••
○	○	○	•••	•••
••	••	••	○	○
••	••	•••	••	••
•	•	•••	••	○
•••	•••	•••	•••	•••
••	••	••	•••	••
•••	•••	••	○	○
•••	•••	•••	○	○

Equipment

Mounting

Direct mounting	+	+	+	+	+	●	●	●	●	●									+	+		+	+	+	+	+					+	+	+		+	+	+
Screw couplings																																					
SW stick			+																																		
SWA 33	●	●	+								●	●	+			●	●	+	●	●	●	●							●	+	+	●	+		●	+	
SWA 33 Solidlink	+	+	+								+	+	+			+	+	+	+	+	+								+	+	+	+		+	+		
SWA 48		+	●	●	●	+						●	●	●	●		+	+	●										●	●	●	+		●	+	●	+
SWA 48 Solidlink		+	+	+	+	+						+	+	+	+		+						+	+	+	+		+	+	+		+	+		+	+	
SWA 66							+	+																					●	●					●		●
SWA 66 Solidlink							+	+																					+	+					+		+
SWA 77													+																								
SWA 77 Solidlink										+																											
SWA 92											+		+																								
SWA 105												+																									
Oilquick OQ 45/5	+																												+								
Oilquick OQ 60/5	+	+	+																											+							
Oilquick OQ Rail			+	+																											+	+	+				
Oilquick OQ 65			+	+																											+	+	+				
Oilquick OQ 70				+	+	+																										+	+				
Oilquick OQ 70/55				+	+	+																											+	+			
Oilquick OQ 80											+																										
Open-S 45 mechanical	+																															+					
Open-S 60 mechanical	+	+	+																													+					
Open-S 65 mechanical			+	+																												+	+	+			
Open-S 70 mechanical				+	+	+																											+	+			
Open-S 70/55 mechanical				+	+	+																											+	+			
Universal mounting	+	+	+	+	+	+	+	+																							+	+	+	+	+	+	+


Other conventional mounting types for all main machine makes available on request.

• = Standard, + = Option

Tooth UNI-25-2C

¹⁾ availability depending on bucket size ²⁾ availability depending on bucket width ³⁾ only possible in combination with Solidlink ⁴⁾ not possible with Solidlink 33
⁵⁾ not possible with limited digging depth ⁶⁾ on request

The Liebherr Group

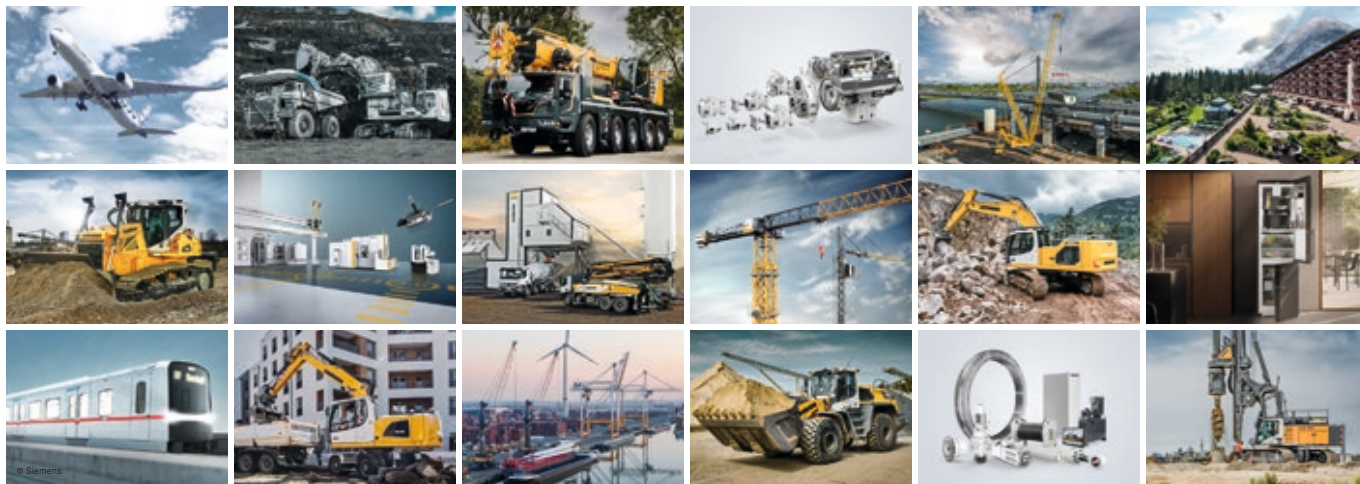

Global and independent: more than 70 years of success

Liebherr was founded in 1949 when, with the development of the world's first mobile tower crane, Hans Liebherr laid the foundations for a family-run company which now has more than 50,000 employees and comprises over 150 companies across every continent. The holding company of the Group is Liebherr-International AG in Bulle, Switzerland, whose shareholders are exclusively members of the Liebherr family.

Technology leadership and pioneering spirit

Liebherr is a pioneer and its forward-looking approach has seen it make important contributions to technology history over a wide variety of industries. Employees throughout the world continue to share the courage of the company founder, sharing a passion to produce innovative products and a determination to provide world-leading equipment and machinery.

Diversified product programme

Liebherr is one of the world's biggest construction machine manufacturers and provides high-quality, user-oriented products and services. Its product programme includes earthmoving machinery, material handling technology, deep foundation machines, mining, mobile and crawler cranes, tower cranes, concrete technology, maritime cranes, aerospace and transportation systems, gear technology and automation systems, refrigerators and freezers, components and hotels.

Customised solutions and maximum customer value

Liebherr solutions are characterised by precision, implementation and longevity. The company is committed to technological excellence and to providing customers with solutions that match their needs exactly. For Liebherr, customer focus does not end with delivery of a product but continues through a comprehensive range of back-up and support services.

www.liebherr.com

Liebherr-Hydraulikbagger GmbH

Liebherrstraße 12 • 88457 Kirchdorf (Iller), Germany • Phone +49 7354 80-0
info.lhb@liebherr.com • www.liebherr.com • www.facebook.com/LiebherrConstruction